


GLASS FILTER – IR BLOCKING

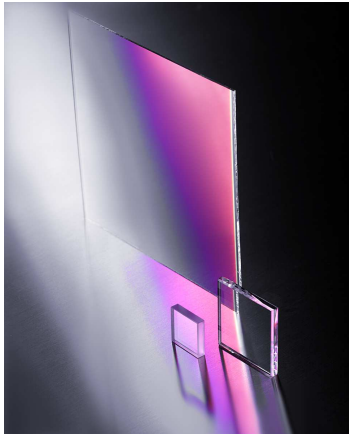

Material No.: 1437746

Substrate: "Borofloat" Borosilicate Glass

Thickness: 2.0 mm

Size: 220 mm x 380 mm

Packing unit: 1 pc

Temperature stability: 400 °C


Thermal shift: < 0.1% / 100 K

T = 50% edge position VIS-NIR: 730 nm +/- 20 nm

Transmission region 425 - 680 nm: T(ave) > 90%

IR blocking region 800 - 1150 nm: T(ave) < 3%

IR blocking standard filter (under AOI 0°)

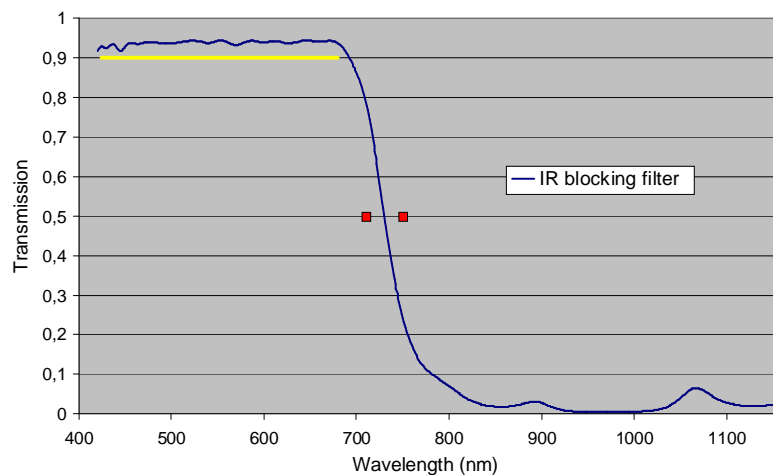

Auer Lighting GmbH

Hildesheimer Straße 35
37581 Bad Gandersheim
Germany

T +49 (0) 5382 701 · 232

F +49 (0) 5382 701 · 452

iris.grundmann@auer-lighting.com

www.auer-lighting.com

Environmental Performance

Adherence: Tape test according to MIL-C 675 C and MIL-C-48497 A

Abrasion: Cheesecloth test according to MIL-M-13508 C and MIL-C-48497 A

Humidity: Climate chamber test according to MIL-C-48497 A

Customs tariff number 70140000